
Battery System

AXE 30.0~60.0H-1HR-E1

- Adopt high -safety LFP battery
- Battery pack modular design, support 30 ~60kWh flexible expansion
- Support 1C continuous charge and discharge
- Battery pack compatible with 19 -inch cabinet installation
- Easy installation and maintenance
- Support multi-rack parallel operation

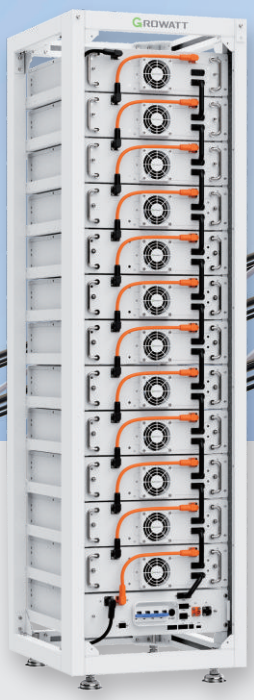

POWER-ING TOMO-RROW

GROWATT

en.growatt.com

Datasheet	AXE 30.0H-1HR-E1	AXE 35.0H-1HR-E1	AXE 40.0H-1HR-E1	AXE 50.0H-1HR-E1	AXE 60.0H-1HR-E1
Control module	AXE 1000100-C1				
Number of control module	1				
Battery module	AXE 5.0H-E1				
Battery module energy	5kWh				
Number of modules in series	6	7	8	10	12
Energy capacity	30kWh	35kWh	40kWh	50kWh	60kWh
Usable capacity	27kWh	31.5kWh	36kWh	45kWh	54kWh
Rated output power	30kW	35kW	40kW	50kW	60kW
Max. output power*[1]	30kW	35kW	40kW	50kW	60kW
Dimension (W/H/D)	570/1560/660mm			570/1964/660mm	
Weight	≤0.38t	≤0.43t	≤0.48t	≤0.59t	≤0.69t
Nominal voltage	307.2V	358.4V	409.6V	512V	614.4V
Operating voltage range	278.4~340.8V	324.8~397.6V	371.2~454.4V	464~568V	556.8~681.6V
Nominal capacity	100Ah(@25℃)				
Battery type	Cobalt Free Lithium Iron Phosphate (LFP)				
Ingress protection	IP20				
Installation	Floor stand				
Operating temperature	-10~50℃				
Relative humidity	5% ~ 95%				
Cooling	Air-Cooling				
Warranty*[2]	5 years				
Noise emission	<60dB				
Maximum elevation	≤2000m				
Control Module	**AXE 1000100-C1**				
Dimension(W/H/D)	482/131/580mm				
Weight	≤15kg				
Communication port	CAN/RS485/USB				
Operating voltage range	120V-1000Vdc				
Maximum current	100A				
Monitoring parameters	SOC, System voltage, current, cell voltage,cell temperature, PCBA temperature				
Battery Module	**AXE 5.0H-E1**				
Nominal energy	5kWh				
Nominal voltage	51.2V				
Pack operating voltage/range	46.4~56.8V				
Battery module dimension (W/H/D)	482/131/580mm				
Battery module weight	≤47kg				
UN 38.3, IEC 62619, IEC 60730, IEC 62477, CE, RoHS, UKCA					

* 1 Depend on the max. battery charge/discharge power of the inverter.
* 2 Detailed warranty terms should be negotiated with Growatt in the warranty agreement.
* Nominal charge/discharge current and power derating will occur related to temperature and SOC.

SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. All specifications are subject to change without notice.

SHENZHEN GROWATT NEW ENERGY CO.,LTD.
T: + 86 755 2747 1900 F: + 86 755 2749 1460
A: 4-13/F,Building A,Sino-German(Europe)Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China
E: info@ginverter.com